

DECONTAMINATION SHELTER SYSTEMS



The HDT line of decontamination shelters uses the same advanced, patented folding frame technology utilized in our standard military shelters. Quick and easy setup enables a rapid response to any situation. Reinforced and anchored by tubing that may be air or water inflated, the berm/floor retains waste water which may be siphoned to a gray water bladder.

HDT's decontamination shelters are equipped with pre-plumbed liners, that further eliminate loose pieces/parts and decrease overall deployment time. The liner is constructed with a translucent fabric which allows light to penetrate while maintaining privacy. The shelters may be purchased individually with showers or as a complete system that includes water distribution.

As with all HDT shelter systems, the modular design enables users to adapt the system to meet specific requirements, especially in cold climates. Wide, stable conveyer systems are also available and can be used for patient movement and triage.

KEY FEATURES

- User-friendly, advanced frame guarantees quick set up and superior strength
- Designed with wide lanes for rapid decon
- Water filled sidewall berm anchors shelter
- Modular design adapts to changing situations
- Completely integrated liner system includes containment berm, plumbing and lane dividers
- Folding frame technology makes set-up quick and easy



HDT Base-X® Shelters are multi-mission ready. Convert this 305 shelter into a Decon Shelter by inserting a 3-lane Decon Liner.

DECONTAMINATION SHELTER SYSTEMS



SPECIFICATIONS

	Model 102 Individual	Model 203 Ambulatory	Model 203 Non-Ambulatory	Model 303 Ambulatory	Model 303 Non-Ambulatory
Part Number					
Individual	7010201	7020301	7020302	7030301	7030302
Complete System***	7010201CS	7020301CS	7020302CS	7030301CS	7030302CS
Interior Dimensions					
Floor Space	10' x 11.5' 3.05 x 3.5 m	9' x 15' 2.74 x 4.57 m	9' x 15' 2.74 x 4.57 m	13' x 15' 3.96 x 4.6 m	13' x 15' 3.96 x 4.6 m
Interior Area	115 ft ² 10.6 m ²	135 ft ² 12.5 m ²	135 ft ² 12.5 m ²	195 ft ² 18.1 m ²	195 ft ² 18.1 m ²
Package Dimensions					
Package 1*	63" x 16" x 14" 160 x 41 x 36 cm	63" x 19" x 17" 160 x 48 x 43 cm	63" x 19" x 17" 160 x 48 x 43 cm	63" x 19" x 18" 160 x 48 x 46 cm	63" x 19" x 18" 160 x 48 x 46 cm
Package 2**	63" x 21" x 18" 160 x 53 x 46 cm	63" x 26" x 18" 160 x 66 x 46 cm	63" x 26" x 18" 160 x 66 x 46 cm	63" x 24" x 19" 160 x 61 x 48 cm	63" x 24" x 19" 160 x 61 x 48 cm
Weight					
Package 1*	57 lbs 25.9 kg	101 lbs 45.8 kg	101 lbs 45.8 kg	146 lbs 66 kg	146 lbs 66 kg
Package 2**	81 lbs 36.7 kg	165 lbs 74.8 kg	165 lbs 74.8 kg	193 lbs 87.5 kg	193 lbs 87.5 kg
Total	138 lbs 62.6 kg	266 lbs 120.6 kg	266 lbs 120.6 kg	339 lbs 154 kg	339 lbs 154 kg
Set-up					
Time	3 – 4 minutes	5 – 8 minutes			
Personnel	2	2	2	4	4
Available Accessories					
Water heater, solution proportioner or solution eductor, sump pump kit, water pump, hoses, extension cords, water manifold kit, lighting, air pump, conveyors, transfer boards.					
Non-Ambulatory Systems include conveyor and transfer board.					


* Outer cover, frame and carry bag

** Liner with pre-installed plumbing and berm floor, kits, and carrying bag

*** The Complete System includes the shelter described above and the list of support equipment shown in the table on this and the next page

Custom Decon Systems available for extreme environments.

Products, product specifications and data are subject to change without notice to improve reliability, function, and/or design. Please contact Customer Service at 800.969.8527 for the most up-to-date product information.

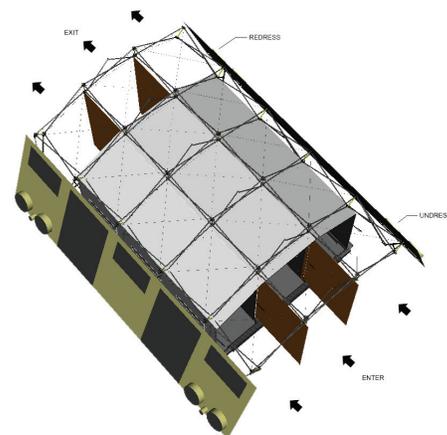

HDT Expeditionary Systems, Inc.

30500 Aurora Road, Suite 100
Solon, OH 44139 USA
P 800.969.8527 / 216.HDT.6111
sales@hdtglobal.com