




Our Ready Fold Flooring is the only portable flooring system on the market today that is specifically designed for rapid deployment use. It is a high-impact, 0.5" (1.3 cm) and 2" (5.1 cm) thick ABS floor that does not conduct cold or electricity. It is flame resistant and carries a UL94HB rating. With its unique connecting system it can be deployed or broken down rapidly every time with little labor commitment. It is also easy to transport and store.

Ready Fold Flooring is a slat-based flooring systems which packs easily for storage or transport. Flooring units may be arranged in unlimited configurations or shapes and provides a durable flooring solution for expeditionary missions.

Also available, Ready Roll Cable Management for managing power cords or segmenting secure from non-secure network cabling. This flooring accessory provides shelters with clean appearance and reduced trip hazards without the need to hang cables or use tape.

KEY FEATURES

- Man-portable
- 500 PSI load strength
- Solid non-slip surface
- UL94HB flame resistance
- Does not conduct heat, cold or electricity
- Resistant to a broad range of chemicals
- Standard 0.5" (1.3 cm) thick, or optional 2" (5.1 cm) thick
- Available in custom lengths
- High strength extruded ABS

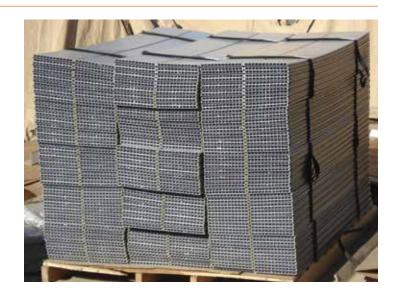



HDT SHELTER FLOORING

Ready Fold Flooring

1/2" READY FOLD FLOORING SPECIFICATIONS

Flooring for	HDT part number	NSN	GSA	Dimensions L x W x H	Packed on skid	Usable floor deployed	Weight
103 Shelter	63-F103RRBK	8340-01-533-6693	Χ	60" x 16" x 13.5"	1 wide 3 high	9.5' x 15'	131 lbs
				152.2 x 40.6 x 34.3 cm		2.9 x 4.6 m	59.4 kg
105 Shelter	63-F105RRBK	N/A	Χ	60" x 32" x 13.5"	2 wide 3 high	9.5' x 25'	219 lbs
				152.2 x 81.3 x 34.3 cm		2.9 x 7.6 m	99.3 kg
203 Shelter	63-F203RRBK	8340-01-533-6719	Χ	60" x 16" x 18"	1 wide 3 high	14' x 15'	186 lbs
				152.2 x 40.6 x 45.7 cm		4.3 x 4.6 m	84.4 kg
205 Shelter	63-F205RRBK	8340-01-533-6714	Χ	60" x 32" x 18"	2 wide 3 high	14' x 25'	311 lbs
				152.2 x 81.3 x 45.7 cm		4.3 x 7.6 m	141.1 kg
303 Shelter	63-F303RRBK	8340-01-533-6735	Χ	60" x 16" x 24"	1 wide 3 high	18' x 15'	242 lbs
				152.2 x 40.6 x 61 cm		5.5 x 4.6 m	109.8 kg
305 Shelter	63-F305RRBK	8340-01-533-6731	Χ	60" x 32" x 24"	2 wide 3 high	18' x 25'	403 lbs
				152.2 x 81.3 x 61 cm		5.5 x 7.6 m	182.8 kg
307 Shelter	63-F307RRBK	8340-01-533-6758	Χ	60" x 32" x 32"	2 wide 3 high	18' x 35'	564 lbs
				152.2 x 81.3 x 81.3 cm		5.5 x 10.7 m	255.8 kg
505 Shelter	63-F505RRBK	N/A	Χ	60" x 32" x 27"	2 wide 3 high	25' x 25'	552 lbs
				152.2 x 81.3 x 68.6 cm		7.6 x 7.6 m	250.4 kg
6D31 Shelter	63-F6D31RRBK	8340-01-566-8911	Χ	60" x 48" x 32"	3 wide 3 high	27' x 31'	535 lbs
				152.2 x 121.9 x 81.3 cm		8.2 x 9.4 m	242.7 kg
8D36 Shelter	63-F8D36RRBK	N/A	Χ	60" x 48" x 35"	3 wide 3 high	31' x 36'	784 lbs
				152.2 x 121.9 x 88.9 cm		9.4 x 11 m	355.6 kg
2021 Shelter	63-FSTAT21RFGY	N/A		60" x 32" x 25"	2 wide 2 high	20' x 21'	386 lbs
				152.2 x 81.3 x 63.5 cm		6.1 x 6.4 m	175.1 kg
2032 Shelter	63-FSTAT32RFGY	N/A		60" x 32" x 30"	2 wide 2 high	20' x 32'	589 lbs
				152.2 x 81.3 x 76.2 cm		6.1 x 9.8 m	267.2 kg
3236A Shelter	63-F3236ARRBK	N/A		60" x 48" x 48"	3 wide 3 high	30' x 55'	1322 lbs
				152.2 x 121.9 x 121.9 cm		9.1 x 16.8 m	599.6 kg
3236B Shelter	63-F3236BRRBK	N/A		60" x 48" x 48"	3 wide 3 high	30' x 46'	1179 lbs
				152.2 x 121.9 x 121.9 cm		9.1 x 14 m	534.8 kg
3236C Shelter	63-F3236CRRBK	N/A		60" x 48" x 48"	3 wide 3 high	30' x 38'	1035 lbs
				152.2 x 121.9 x 121.9 cm		9.1 x 11.6 m	469.5 kg

HDT SHELTER FLOORING

Ready Fold Flooring



2" READY FOLD FLOORING SPECIFICATIONS

Flooring for	HDT part number	NSN	GSA	Dimensions L x W x H	Packed on skid	Usable floor deployed	Weight
103 Shelter	63-F1032RRBK	N/A		60" x 48" x 14"	3 wide 1 high	9.5' x 15'	292 lbs
				152.4 x 121.9 x 35.6 cm		2.9 x 4.6 m	132.4 kg
105 Shelter	63-F1052RRBK	N/A		60" x 48" x 28"	3 wide 2 high	9.5' x 25'	487 lbs
				152.4 x 121.9 x 71.1 cm		2.9 x 7.6 m	220.0 kg
203 Shelter	63-F2032RRBK	N/A		60" x 48" x 20"	3 wide 1 high	14' x 15'	415 lbs
				152.4 x 121.9 x 50.8 cm		4.3 x 4.6 m	188.2 kg
205 Shelter	63-F2052RRBK	N/A		60" x 48" x 40"	3 wide 2 high	14' x 25'	692 lbs
				152.4 x 121.9 x 101.6 cm		4.3 x 7.6 m	313.9 kg
303 Shelter	63-F3032RRBK	N/A		60" x 48" x 27"	3 wide 1 high	18' x 15'	538 lbs
				152.4 x 121.9 x 68.6 cm		5.5 x 4.6 m	244 kg
305 Shelter	63-F3052RRBK	N/A		60" x 48" x 54"	3 wide 2 high	18' x 25'	897 lbs
				152.4 x 121.9 x 137.2 cm		5.5 x 7.6 m	406.9 kg
307 Shelter	63-F3072RRBK	N/A		60" x 48" x 70"	3 wide 3 high	18' x 35'	1256 lbs
				152.4 x 121.9 x 177.8 cm		5.5 x 10.7 m	569.7 kg
505 Shelter	63-F5052RRBK	N/A		60" x 48" x 64"	3 wide 2 high	25' x 25'	1230 lbs
				152.4 x 121.9 x 162.6 cm		7.6 x 7.6 m	557.9 kg
6D31 Shelter	63-F6D312RRBK	N/A		60" x 48" x 45"	3 wide 3 high	27' x 31'	1193 lbs
				152.4 x 121.9 x 114.3 cm	(2 skids)	8.2 x 9.4 m	541.1 kg
8D36 Shelter	63-F8D362RRBK	N/A		60" x 48" x 48"	3 wide 3 high	31' x 36'	1747 lbs
				152.4 x 121.9 x 121.9 cm	(2 skids)	9.4 x 11 m	792.4 kg
2021 Shelter		N/A		60" x 48" x 60"	3 wide 2 high	20' x 21'	861 lbs
				152.4 x 121.9 x 152.4 cm		6.1 x 6.4 m	390.5 kg
2032 Shelter		N/A		60" x 48" x 70"	3 wide 2 high	20' x 32'	1312 lbs
				152.4 x 121.9 x 177.8 cm		6.1 x 9.8 m	595.1 kg
3236A Shelter		N/A		60" x 48" x 90"	3 wide 2 high	30' x 55'	3160 lbs
				152.4 x 121.9 x 228.6 cm	(2 skids)	9.1 x 16.8 m	1433.4 kg
3236B Shelter		N/A		60" x 48" x 90"	3 wide 2 high	30' x 46'	2735 lbs
				152.4 x 121.9 x 228.6 cm	(2 skids)	9.1 x 14 m	1240.6 kg
3236C Shelter		N/A		60" x 48" x 90"	3 wide 2 high	30' x 38'	2305 lbs
				152.4 x 121.9 x 228.6 cm	(2 skids)	9.1 x 11.6 m	1045.5 kg

HDT SHELTER FLOORING

Supa-Trac Flooring, Ready Roll Flooring, and Cable Management





SUPA-TRAC FLOORING

Our Supa-Trac flooring is a strong, durable portable floor. The joint provides articulation between panels that allows the surface to conform without bending and breaking panels. The U-shaped ribs provide twice the strength of a normal rib. Supa-Trac has more ribs and more material per square foot than other floors. The panels have aeration slots that allow moisture and air to pass through the surface which minimizes overheating and helps keep turf healthy for a long time. The U-shaped rain channels, while providing drainage on the top surface, create a much larger bearing surface on the bottom. It is extremely fast to install and requires no skills. The product is deployed in sheets - simply lay them next to one another and walk along the seam. No big, awkward rolls to load, unload and handle over and over.





READY ROLL FLOOR, DECON

Made of durable ABS plastic that stays flexible even in cold temperatures. Can be rolled or nested to reduce storage apace. Very light at only 1.5 lbs (0.68 kg) per square foot (0.09 m²).

CABLE MANAGEMENT SYSTEM

Designed primarily for use with the Ready Fold Tactical Flooring System. Installs and strikes quickly. Simply fastens to the flooring surface for multi-directional cable access. Developed specifically to facilitate segregation of LAN networks within an installation such as classified from unclassified as well as LAN network cabling from power runs within the complex.

HDT Global

30500 Aurora Road Suite 100 Solon, OH 44139 USA P 800.969.8527 / 540.887.4700 sales@hdtglobal.com

SUPA-TRAC FLOORING SPECIFICATIONS

Size	HDT Part Number	NSN	GSA	Dimensi	ons (L x W)	Weight	
Edging	63F-STEDGE	N/A	Χ	9" x 3.5"	22.8 x 8.9 cm	0.38 lbs	0.17 kg
36" x 9" x 1.3" Section	63FST36X9VG	N/A	Χ	3' x 0.75'	0.9 x 0.2 m	6 lbs	2.7 kg
For 103 Shelter	63-F103STVGBK	N/A	Χ	9.5' x 15'	2.9 x 4.6 m	379 lbs	172 kg
For 105 Shelter	63-F105STVGBK	N/A	Χ	9.5' x 25'	2.9 x 7.6 m	543 lbs	246 kg
For 203 Shelter	63-F203STVGBK	N/A	Χ	14' x 15'	4.3 x 4.6 m	515 lbs	234 kg
For 205 Shelter	63-F205STVGBK	N/A	Χ	14' x 25'	4.3 x 7.6 m	859 lbs	390 kg
For 303 Shelter	63-F303STVGBK	N/A	Χ	18' x 15'	5.5 x 4.6 m	627 lbs	284 kg
For 305 Shelter	63-F305STVGBK	N/A	Χ	18' x 25'	5.5 x 7.6 m	995 lbs	452 kg
For 307 Shelter	63-F307STVGBK	N/A	Χ	18' x 35'	5.5 x 10.7 m	1435 lbs	651 kg
For 505 Shelter	63-F505STVGBK	N/A	Χ	26' X 25'	7.9 x 7.6 m	1373 lbs	623 kg
For 6D31 Shelter	63-F6D31STVGBK	N/A	Χ	27' x 31'	8.2 x 9.4 m	1855 lbs	842 kg
For 8D36 Shelter	63-F8D36STVGBK	N/A	Χ	31' x 37'	9.4 x 11.3 m	2470 lbs	1121 kg
Black Cable Trays	63-FCTSTVGBK	N/A	Χ				
Grey Cable Trays	63-FCTSTVGGY	N/A	Χ				

DECON READY ROLL FLOOR, YELLOW SPECIFICATIONS

Size	HDT Part Number	NSN	GSA	Dimensions (L x W x	H) Weight
3' x 14.5'	73DF001YL	N/A	Χ	14.5' x 3' x 1.75"	66 lbs
				4.4 x 9 x .04 m	30 kg
18" x 14.5'	73DF002YL	N/A	Χ	14.5' x 18" x 1.75"	33 lbs
				4.4 x .5 x .04 m	15 kg
18" x 10'	73DF003YL	N/A	Χ	10' x 18" x 1.75"	23 lbs
				3.0 x .5 x .04 m	10.4 kg

CABLE MANAGEMENT SYSTEM SPECIFICATIONS

Description	HDT Part Number	NSN	GSA	Dimensions (L x W x H	Weight
48" Section	48" Section 63-FCM48BK			48" x 12" x 1.25"	6.5 lbs
				121.9 x 30.5 x 38.1 cm	2.9 kg
Ten 48" Sections	63-FCM480BK	N/A		48" x 12" x 1.25"*	6.5 lbs*
				121.9 x 30.5 x 38.1 cm*	2.9 kg*

^{*} Per 48" (121.9 cm) section



THIS COMMODITY, TECHNOLOGY OR SOFTWARE IS SUBJECT TO THE EXPORT ADMINISTRATION REGULATIONS (EAR), 15 CFR 730-774, OF THE UNITED STATES OF AMERICA.